

Packaging - Specification container for transport




ECOBULK LX 1000 UN / DN150, G2-plug with vent /
int. butterfly-valve, ETFE-g. / 2 label plates /
Wood-skidpallet (HT-F)

SCHÜTZ GmbH & Co.KG&A
Schützstraße 12
D 56242 Selters / Germany

Date: 12.08.2008 / TE-KO / ss
Page 1 from 2

Article - No.: 4003711

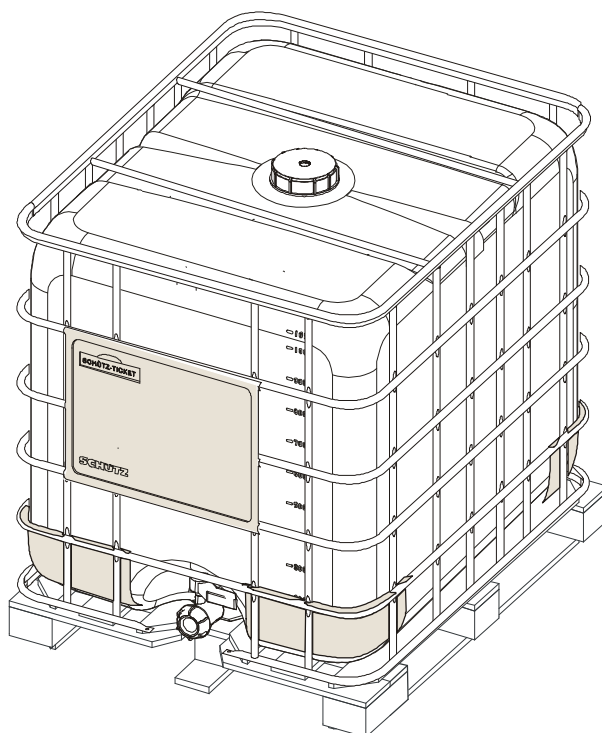

Technical data:

Nominal Capacity:	1000	Litre
Brimful Capacity:	1060	Litre
Length:	1200	mm
Width:	1000	mm
Height with pallet:	1160	mm
Filling opening:	150	mm
Fork opening:	95	mm
Label plate:	2	piece
Corner Protector:	4	piece
Weight:	Inner container:	15,5 kg
	Total approx:	67,0 kg

Technical subjects to change, all dimensions approximately

Packaging - Specification container for transport



ECOBULK LX 1000 UN / DN150, G2-plug with vent /
int. butterfly-valve, ETFE-g. / 2 label plates /
Wood-skidpallet (HT-F)

SCHÜTZ GmbH & Co.KGaA
Schützstraße 12
D 56242 Selters / Germany

Date: 12.08.2008 / TE-KO / ss
Page 2 from 2

Article - No.: 4003711

Construction:

Outer Container: Rectangular grid box made of tubular Steel material, connected on top with tie-bar, label plate with Schütz-Ticket on front side, additional label plate on the back side.
Material: Grid / Bottom plate: Steel, galvanized
Corner Protector: 4 pieces made of PE-HD

Inner Container: Rectangular blow molded tank of high density polyethylene, with filling opening in the middle of the top section.
Material: Discharge opening at the bottom of the front side.
PE-HD, natural

Filling Opening: DN150 with external thread, closed with screw cap, G2-plug with vent, sealing-cap and gasket.
Material: Screw cap DN150: PE-HD, red
O-ring gasket: TPE
G2-plug: PP
O-ring G2-plug: EBA, natural
Vent: Silicone-FDA

Discharge Opening: Intergrated butterfly-valve DN50 with blue handle. Outlet sealed with an PE-lined Alu-film. Valve closed with screw cap, PE-disk and flat-gasket.
Material: Outlet nozzle enclosed.
Butterfly-valve housing: PE-HD, natural
Flap-gasket: ETFE
Screw cap DN50: PE-HD, black
Flat-gasket screw cap: PE, foam
PE-disk: PE-HD, red
Outlet nozzle: PE-HD, natural

Pallet: Wood-skidpallet (1000 x 1200 mm), 4-way entry
Material: Wood => Heat treatment acc. FAO (HT-F)

Heavy metals: Concentration level of heavy metals (Pb, Cd, Cr VI and Hg) in packaging does not exceed 100ppm

Delivery: Ready for filling

UN-Marking: UN 31 HA1

Technical subjects to change, all dimensions approximately